


# PRODUCT SPECIFICATION DRAWING

## Hydroflame Pro Series - Floor Drain Sleeve

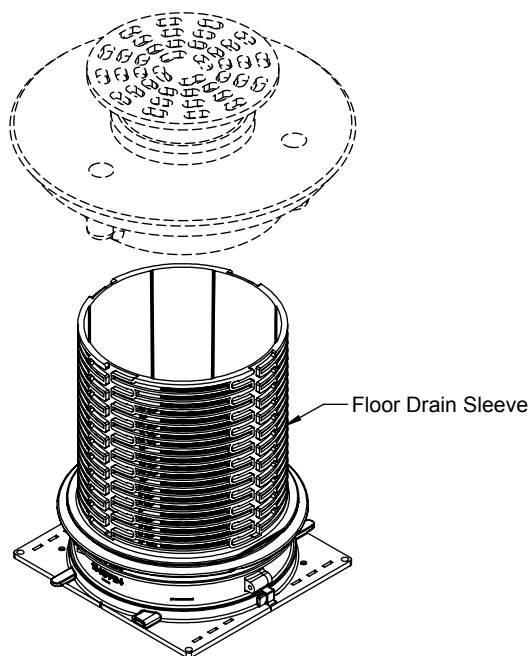

Technical Data for HydroFlame Pro Firestop Device	
Product Test Criteria	
UL Fire Tested & Listed to UL1479 (ASTM E814) & CAN/ULC S115	
UL Ratings (consult individual product specs & UL Systems):	
"L": No; "F": 2 Hrs. typical; "T": No; "W": No (UL system may require caulk)	

The **HOLDRITE® Hydroflame Pro Series "Floor Drain Sleeves"** are designed to accept 2", 3", 4" & 6" cast iron floor drains, with neo-lock style rubber gasket outlet. The Sleeve is cut to the desired height and the Sleeve is secured to the form deck by the installer's preferred method. The Sleeve includes a Mid-Body Seal to enhance water-tightness. (Drain NOT included). Models include #HFP-2CI-DRN thur #HFP-6CI-DRN. Adapting to some drains may require optional extension, available separately.

### Product Information:

- Material:
  - Main Body & Base: Polypropylene.
  - Mid-Body Seal: Thermoplastic Rubber (TPR); Mold & Fungus resistant per ASTM G-21.
- Patented & Patents Pending.
- See Hydroflame Pro Series Installation Instructions, Best Practices documents and the latest UL Fire Resistive Directory file (R25101) for details.



Blue & White Seal, Inc.



THIS INFORMATION IS PROPRIETARY TO HOLDRITE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION.



**HOLDRITE®**  
**HYDROFLAME™**  
PRO SERIES



SYSTEMS & SERVICE



800-321-0316 OR 760-744-6944 / FAX: 760-744-0507 / WWW.HOLDRITE.COM  
spec\_HFP Series, Floor Drain Sleeve, pg8 of 12\_RevB

Product Submittal	
Job Name:	
Date:	
Part Number:	Qty:
Architect / Owner:	
Contractor:	
Notes:	