



| Product Submittal |  |
|-------------------|--|
| Name              |  |
| Date              |  |
| Architect/Owner   |  |
| Contractor        |  |
| Tag               |  |
| Notes             |  |


## HoldRite HydroFlame™ Floor Drain Specification Sheet/Drawing

The HoldRite Hydroflame™ Pro Series "Floor Drain Sleeves" are designed to accept 2", 3", 4" & 6" cast iron floor drains, with neo-lock style rubber gasket outlet. The Sleeve is cut to the desired height and the Sleeve is secured to the form deck by the installer's preferred method. The Sleeve includes a Mid-Body Seal to enhance water-tightness. (Drain NOT included). Models include #HFP-2CI-DRN thru #HFP-6CI-DRN. Adapting to some drains may require optional extension, available separately.

### Product Information:

- Material:
  - Main Body & Base: Polypropylene.
  - Mid-Body Seal: Thermoplastic Rubber (TPR); Mold & Fungus resistant per ASTM G-21.
- Patented & Patents Pending.
- HydroFlame™ Pro Sleeve tested in accordance to ASTM E90. Please see appropriate testing reports for further STC information.
- See Hydroflame™ Pro Series Installation Instructions, Best Practices documents and the latest UL Fire Resistive Directory file (R25101) for details.
- "FBC™ System Compatible indicates that this product has been tested, and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® piping systems and products made with TempRite® Technology." The FBC™ System Compatible Logo, FBC™, FlowGuard®, BlazeMaster®, Corzan®, and TempRite® are trademarks of Lubrizol Advanced Materials, Inc. or its affiliates."



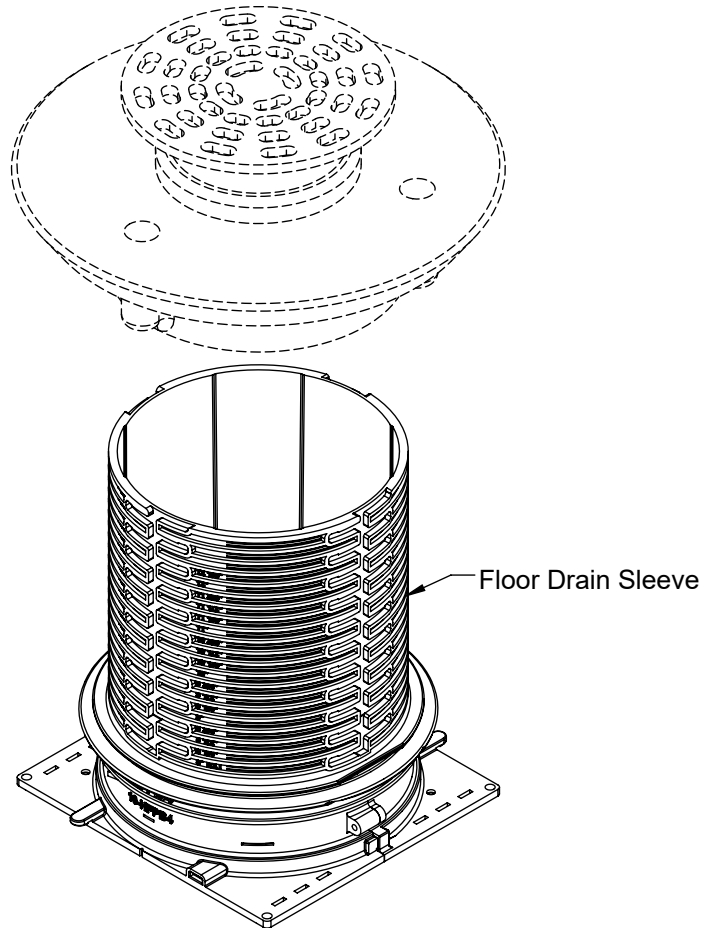

| Technical Data for HydroFlame™ Pro Firestop Device                           |
|------------------------------------------------------------------------------|
| <b>Product Test Criteria</b>                                                 |
| UL Fire Tested & Listed to UL1479 (ASTM E814) & CAN/ULC S115                 |
| UL Ratings (consult individual product specs & UL Systems):                  |
| "L": No; "F": 2 Hrs. typical; "T": No; "W": No (UL system may require caulk) |