

The Engineered Solution for IPEX Pipes


Holdrite™ 117 Series Spigot Fitting Restraints

We are proud to introduce the only engineered solution in the market for large diameter (8", 10", & 12") IPEX System 15™ and System XFR™ pipe that is secured by MJ Grey™ Couplings.

- To prevent horizontal and vertical movement, thrust load or oscillation caused by hydraulic jumps, the building code and pipe manufacturers recommends that horizontal pipe and fittings five (5) inches and larger shall be suitably restrained to prevent horizontal movement at every branch opening or change of direction using suitable method.
- The HoldRite #117 Series Spigot Fitting Restraints are designed to reinforce PVC systems installed in accordance with HoldRite installation instructions and that of System 15 / System XFR manufactured by IPEX Inc. and applicable requirements in CSA B181.2, CSA B602, and NPC 2020.
- Currently available for PVC pipe sizes of 8", 10", and 12".
- When using HoldRite 117 series restraints (models 117-8T, 117-10S and 117-12S) in conjunction with IPEX System 15 / XFR pipe and MJ Grey couplings a safe thrust pressure rating of 50' head pressure is achieved. Note: It is not intended to suggest that PVC (System 15 / System XFR) pipe and fittings should be subjected to pressures more than the pipe manufacturers' recommendations.

Product Details

Part Number	Size	Description	Pipe Compatibility
117-8T	8 in.	2 galvanized straps, 4 stainless steel band clamps	Spigot System 15 / System XFR
117-10S	10 in.	2 black iron pipe clamps, 2 galvanized steel straps w/ T-bolts	Spigot System 15 / System XFR
117-12S	12 in.	2 black iron pipe clamps, 2 galvanized steel straps w/ T-bolts	Spigot System 15 / System XFR

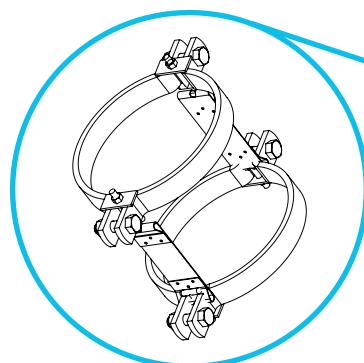

For more information, visit
holdrite.com

Connect with us

